




Surface Track

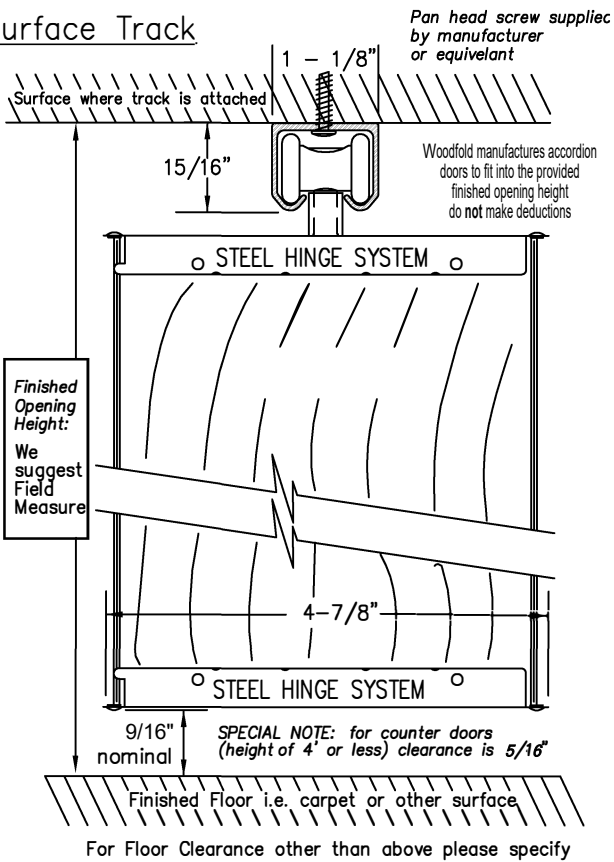


Recessed Track

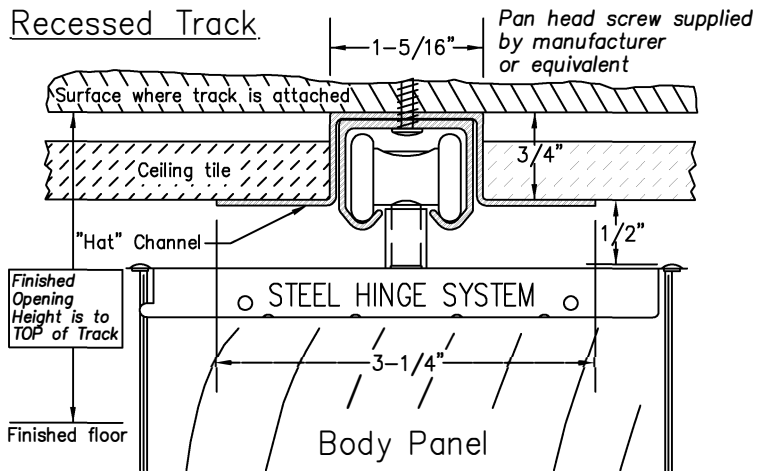


I-Beam Track

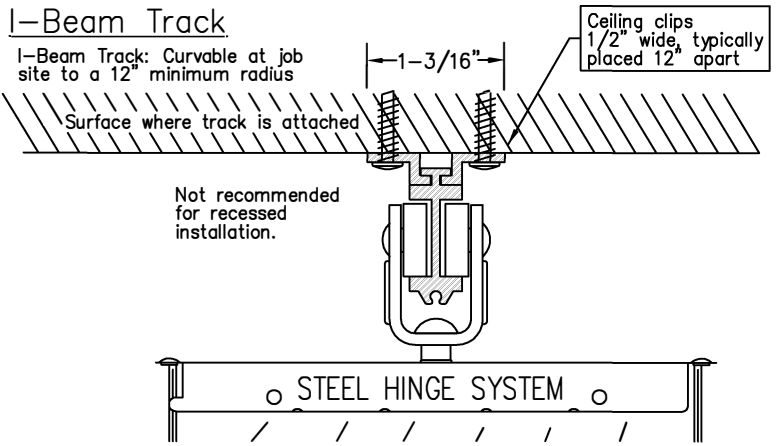


Lead Post, Interlocking jamb & Handle

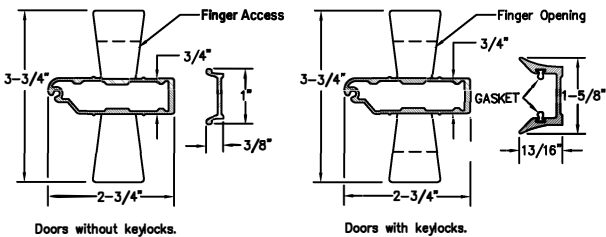


Door Types

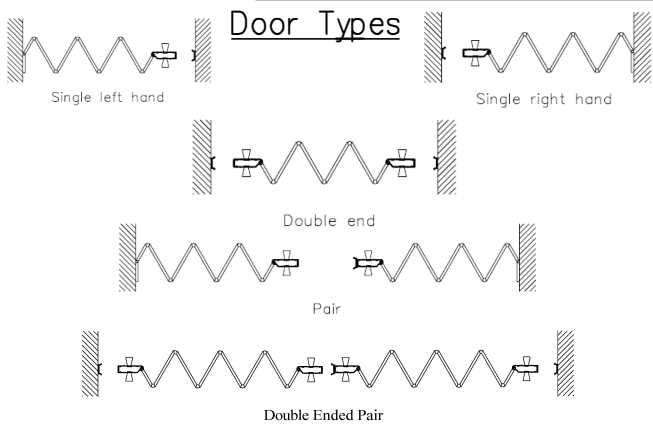


Sliding Jamb Option

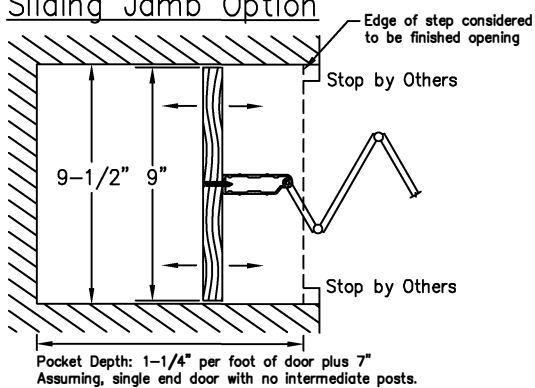


Mounting Panel

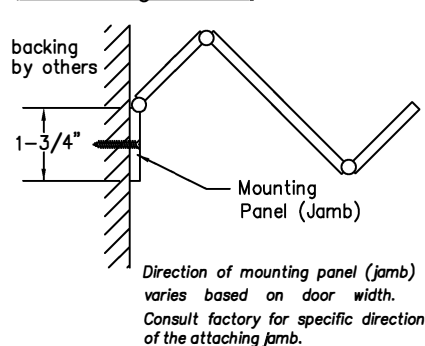

Multiple Meeting Option




Stack Dimensions

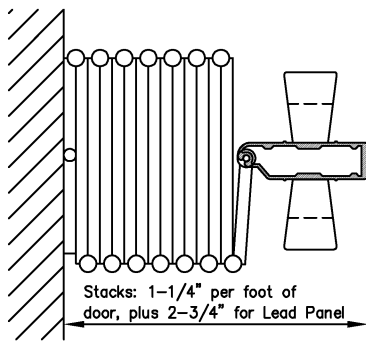

Intermediate Posts add 4" to Stack
Each Lead Post adds 2-3/4" to Stack

Intermediate Rolling Post

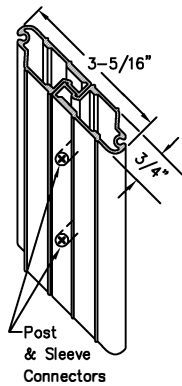


Required at 30'-0"

Privacy Latch




Privacy Latch on both sides is standard

Keylock

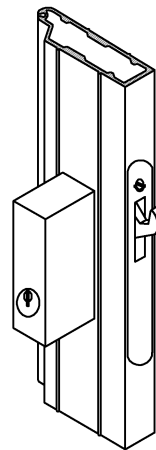


Single Cremone Bolt Keylock

Cannot be Keyed Alike

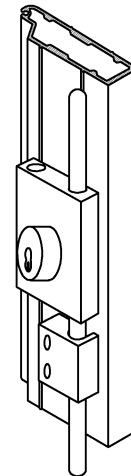

Double Cremone Bolt Keylock

Cannot be Keyed Alike or have another lock on the lead

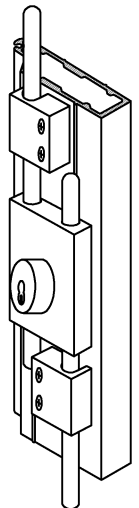

INFORMATION

- Opening Width: Widths up to 30'-0" without Intermediate Posts
- Opening Height: Custom made up to 10' -1"
- Panels: Natural hardwood or vinyl-lam on MDF core 1/4" thick
- Panel Connectors: Extruded Vinyl Black, Brown Gray, Sand or White
- Hinge Hardware: Bronze or Silver
- Wheels: Ball bearing nylon wheels on steel axles (I-Beam for Curved Option)
- Track Aluminum (straight or curvable): Bronze or Silver
- Recessed Hat Channel: Aluminum (straight only): White
- Lead Post, Interlocking jamb & Intermediate Post:
Black, Bronze, Silver, Sand or White Coordinated with panel connector
- Latch: Deadlatch with thumb turn two sides
- Header: Constructions Details by Others

Height	Average Weight
6'-10"	10lbs. Per lined foot
8'-1"	12lbs. Per lined foot
10'-1"	15lbs. Per lined foot

See Woodfold Accordion Door brochure for additional details

Catch/Lock Options

- Magnet
- Privacy Latch
- Springlatch
- Keylock 1 Side
- Keylock 2 Side
- Single Cremone
- Double Cremone
- Footbolts
- Keylock Options
- Magnet with strike plate centered at handle
- Thumbturn w/Emergency release opposite side
- Springlatch with thumb turn two sides
- Deadlatch with thumb turn one side, keylock one side
- Deadlatch with keylock two sides
- Single cremone with keylock (can't be keyed to match door lock)
- Double cremone with keylock (can't be keyed to match door lock)
- Drop Bolt or Spring Pin Bolt
- Weiser Cylinder 6-Pin (Standard), Schlage 5-Pin cylinder or BEST Construction core to be keyed on site by others to match existing job

Job Name: _____ Architects Acceptance

Job Location: _____

Supplier: _____

Qty.	Single End/Double End	Stack or Pair	Width X Height	Material Finish/Color	Options

THESE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE